



Spooler 80T

Technical data

Length:	7580mm
Width:	2435mm
Height:	2815mm
Max Reel Dia:	4000mm
Max Reel Width:	4000mm
Machine weight:	11.200Kg Without shaft
Lifting:	Fitted with forklift pockets & 4 point lifting sling set fitted (without reel).
Design Temperature:	-10° up to +40°C


Performance Data

Low Speed


Layer Diameter (mm)	Pull @ 235 bar (Tonnes)	Winch Speed (M/Min)
500	23.57	23.00
1000	11.78	46.00
1500	7.86	69.00
2000	5.89	92.00
2500	4.71	115.00
3000	3.93	138.00
3500	3.37	161.00
4000	2.95	184.00

High speed

Layer Diameter (mm)	Pull @ 235 bar (Tonnes)	Winch Speed (M/Min)
500	11.78	46.00
1000	5.89	92.00
1500	3.93	138.00
2000	3.95	184.00
2500	2.36	230.00
3000	1.96	276.00
3500	1.68	322.00
4000	1.47	368.00

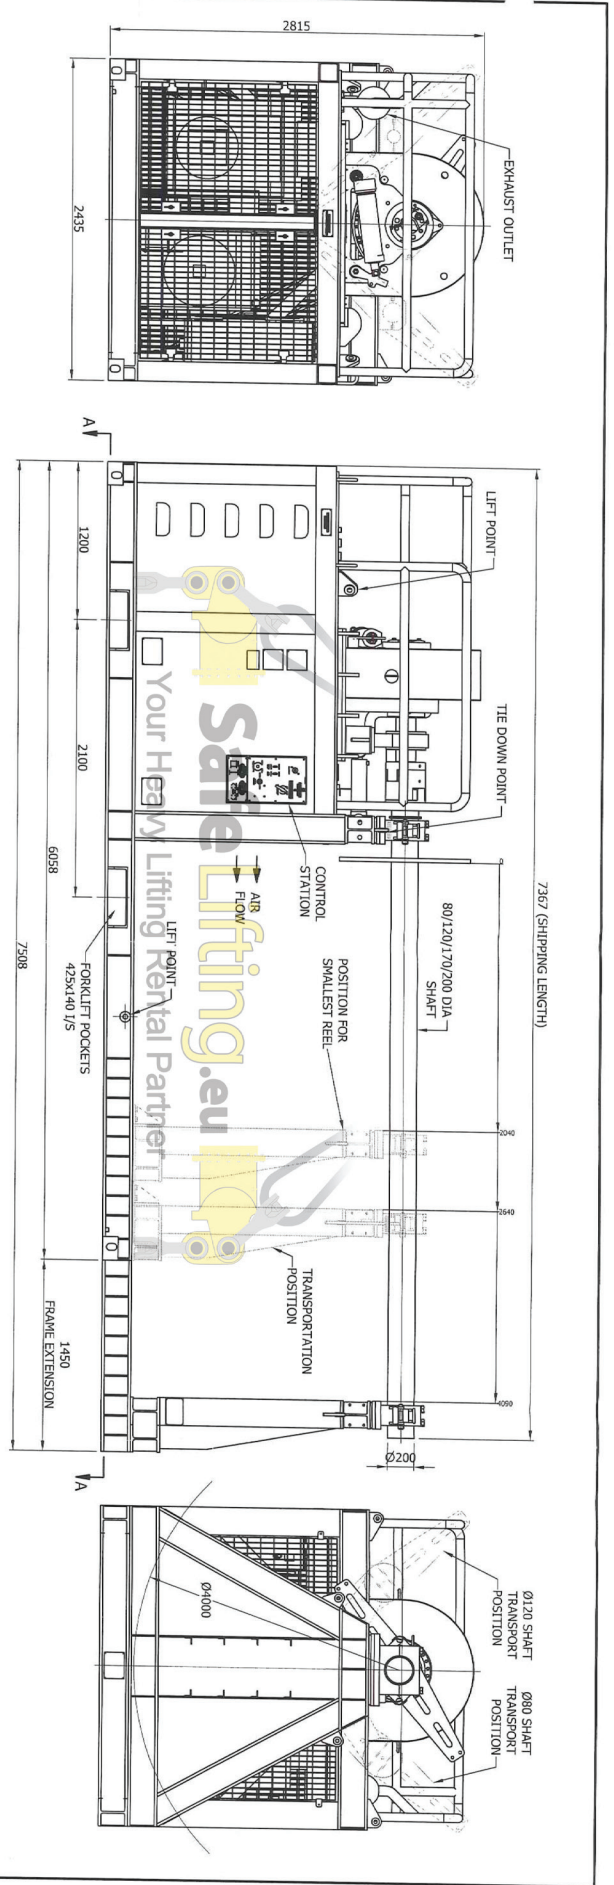

WARNING:
DO NOT LIFT THE SPOOLER USING THE FORK LIFT POCKETS WITH THE FRAME EXTENSION FITTED

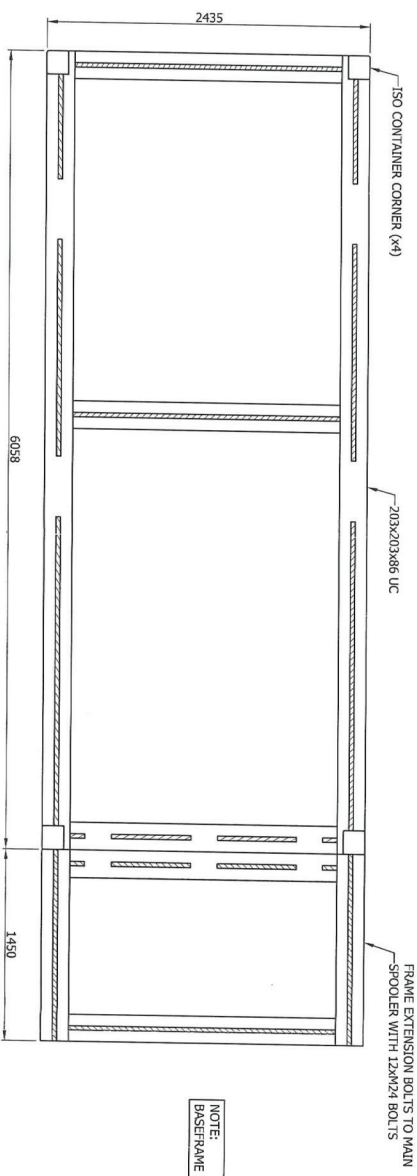

NOTE:
BASKETFRAME MATERIAL - S355

WINCH SPECIFICATION		STANDARD NOTES:		Weight	Drawn by	Checked by	Date	Approved by	Date	Scale	Status
ID N°	1350	1. ALL DIMENSIONS ARE IN MILLIMETERS (mm).	2. REMOVE ALL BARRS & SHARP EDGES.	AB	AW	25/2/10	NN	25/2/10	1:35	Released	
WINCH WEIGHT	16 TONNES	3. ALL MATERIAL CERTIFICATE TO BE IN ACCORDANCE WITH EN 10204-3.2	4. UNMATCHED SPACES TO BE CLEAN AND MATERIAL.	THIS DRAWING IS COPYRIGHTED TO THE PROPERTY OF SAFELIFTING.EU AND MUST NOT BE USED WITHOUT THE EXPRESS PERMISSION OF SAFELIFTING.EU.							
WINCH DIMS (mm)	7367 X 2435 X 2815(H)	5. PART NUMBER TO BE ENGRAVED / SHARPED ON COVERED PART	6. PART NUMBER TO BE ENGRAVED / SHARPED ON COVERED PART								
WIRE EXIT POSITION	UNDER/OVER SPOOLING	GENERAL DIMENSIONS:		60 TONNE SPOOLING WINCH GENERAL ARRANGEMENT							
MAX REEL DIMS	4m x 4m	DRAWING: 0246-000-00		THIRD ANGLE PROJECTION							
LIFTING ARRANGEMENT	4 POINT SLING & LIFTING POCKETS	DRAWING: 0246-000-00		REV 1 1/1							

REV	DESCRIPTION	DATE	BY
1	FIRST ISSUE	24.2.10	AB
	ISSUE APPROVAL		