



Material : Mild steel
 Safety Factor : 4 times
 Finish : Painted
 Temperature Range : -20 °C up to +180 °C
 Standard Certification : Certificate of Conformity
 Proofload Certificate




Sheaves with roller bearing on request.



Groove size can be modified on request for customized rope sizes.



Available with shackle

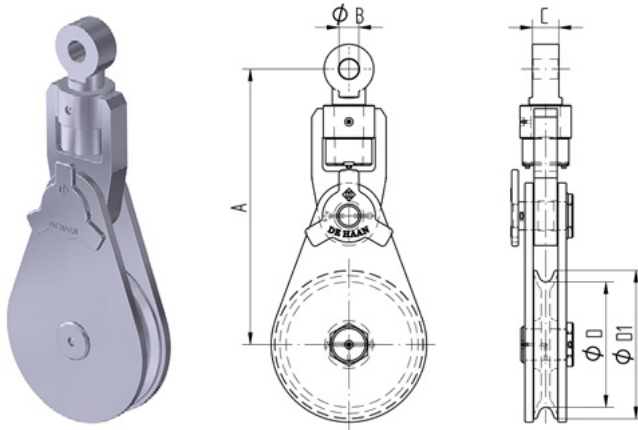

| Type | SWL | Rope size | Line pull | Suitable for Shackle | A | ØB | C | ØD | ØD1 | Weight |
|--------|------|-----------|-----------|----------------------|------|-----|-----|-----|------|--------|
| | tons | mm | tons | | mm | | | | | kg ± |
| H43106 | 17 | 22 - 25 | 8.5 | 17 | 490 | 44 | 57 | 110 | 150 | 49 |
| H43108 | 25 | 25 - 28 | 12.5 | 25 | 602 | 53 | 70 | 150 | 200 | 78 |
| H43110 | 25 | 28 - 32 | 12.5 | 25 | 632 | 53 | 70 | 190 | 250 | 92 |
| H43112 | 25 | 28 - 32 | 12.5 | 25 | 662 | 53 | 70 | 240 | 300 | 112 |
| H43114 | 25 | 28 - 32 | 12.5 | 25 | 692 | 53 | 70 | 290 | 350 | 127 |
| H43118 | 35 | 32 - 38 | 17.5 | 35 | 835 | 60 | 80 | 380 | 450 | 213 |
| H43120 | 35 | 32 - 38 | 17.5 | 35 | 865 | 60 | 80 | 430 | 500 | 243 |
| H43124 | 35 | 32 - 38 | 17.5 | 35 | 925 | 60 | 80 | 535 | 605 | 308 |
| H43224 | 55 | 38 - 42 | 27.5 | 55 | 1040 | 73 | 100 | 520 | 605 | 449 |
| H43230 | 85 | 44 - 48 | 42.5 | 85 | 1212 | 85 | 120 | 630 | 750 | 938 |
| H43234 | 120 | 50 - 55 | 60 | 120 | 1327 | 100 | 140 | 740 | 860 | 1319 |
| H43236 | 150 | 60 - 70 | 75 | 150 | 1427 | 113 | 160 | 760 | 910 | 1600 |
| H43242 | 200 | 75 - 85 | 100 | 200 | 1630 | 135 | 170 | 870 | 1060 | 2285 |
| H43246 | 250 | 88 - 93 | 125 | 250 | 1785 | 145 | 190 | 970 | 1170 | 3015 |