



HD TURNBUCKLE EYE EYE

Material	:	High tensile steel
Safety Factor	:	5 times
Finish	:	Painted RAL 5013
Temperature Range	:	-4°F up to 356°F
Standard Certification	:	Certificate of Conformity


This type of rigging screw meets the requirement as laid down in the Dutch, British, American and other dock regulations. Deliverable with two securing nuts or plates upon request. Custom design screws can be constructed in any size and capacity. Rigging screws are supplied with trapezium thread.

Proof Load Certificate on request.

Non-standard sizes or custom products available on request.

**Only with additional locking device suitable for lifting.
(On request available)**

Standard supplied with two securing nuts. This type of rigging screw meets the requirements as laid down in the Dutch, British, American and other Dock regulations.

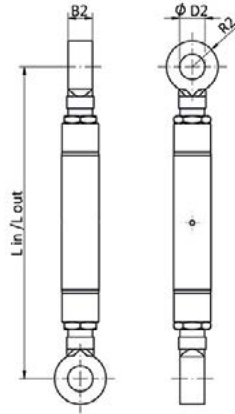

Trap.	Article number	SWL		L IN	L OUT	B2	R2	ØD2
		USt	kN					
inch	painting RAL 5013 blue			inch		Stud Eye (inch)		
2 3/16 x 3/8	HDRS013,5EE	14,9	133	33 1/8	45 29/32	2	2 1/16	2 1/8
2 1/8 x 3/8	HDRS017EE	18,7	167	36 7/32	50	2 7/32	2 13/16	2 5/8
2 3/8 x 3/8	HDRS025EE	27,6	245	38 7/16	51 7/16	2 13/16	2 13/16	2 13/16
3 x 3/8	HDRS030EE	33,1	294	40 7/32	54 23/32	2 13/16	3	2 29/32
3 1/8 x 3/8	HDRS035EE	38,6	343	43 5/16	59 1/8	3 1/8	3 5/16	3 3/32
3 1/2 x 3/8	HDRS045EE	49,6	442	46 1/8	65	3 1/2	3 23/32	3 23/32
4 x 3/8	HDRS055EE	60,6	540	50	70 7/8	3 29/32	4 1/8	4 1/8
4 3/8 x 3/8	HDRS070EE	77,2	687	54 23/32	76 7/16	3 29/32	4 1/2	4 7/16
4 23/32 x 3/8	HDRS085EE	93,7	834	59 1/8	84 3/8	4 29/32	5 1/16	5 1/8
5 1/8 x 3/8	HDRS100EE	110,2	981	63	91 23/32	4 29/32	5 23/32	5 3/8
5 1/2 x 3/8	HDRS120EE	132,3	1177	68 5/16	91 23/32	5 1/2	6 23/32	6 1/8
6 1/16 x 3/8	HDRS160EE	176,4	1570	73 7/32	96 29/32	6 5/16	7 1/2	7 1/8
7 1/8 x 3/8	HDRS200EE	220,5	1962	78 23/32	103 1/8	6 23/32	7 29/32	7 3/8
7 3/8 x 3/8	HDRS250EE	275,6	2453	87	113 7/16	7 1/2	10 7/32	10