


SOFTSLING FRIENDLY ROV HOOK

TYPE HK14

Material : Alloy steel
 Safety factor : 4 times
 Finish : Painted
 Temperature range : -40°C up to +200°C, Polar Rated
 Standard certification : Certificate of Conformity
 3.1 material certificated EN 10204

Non-standard sizes or custom products available on request

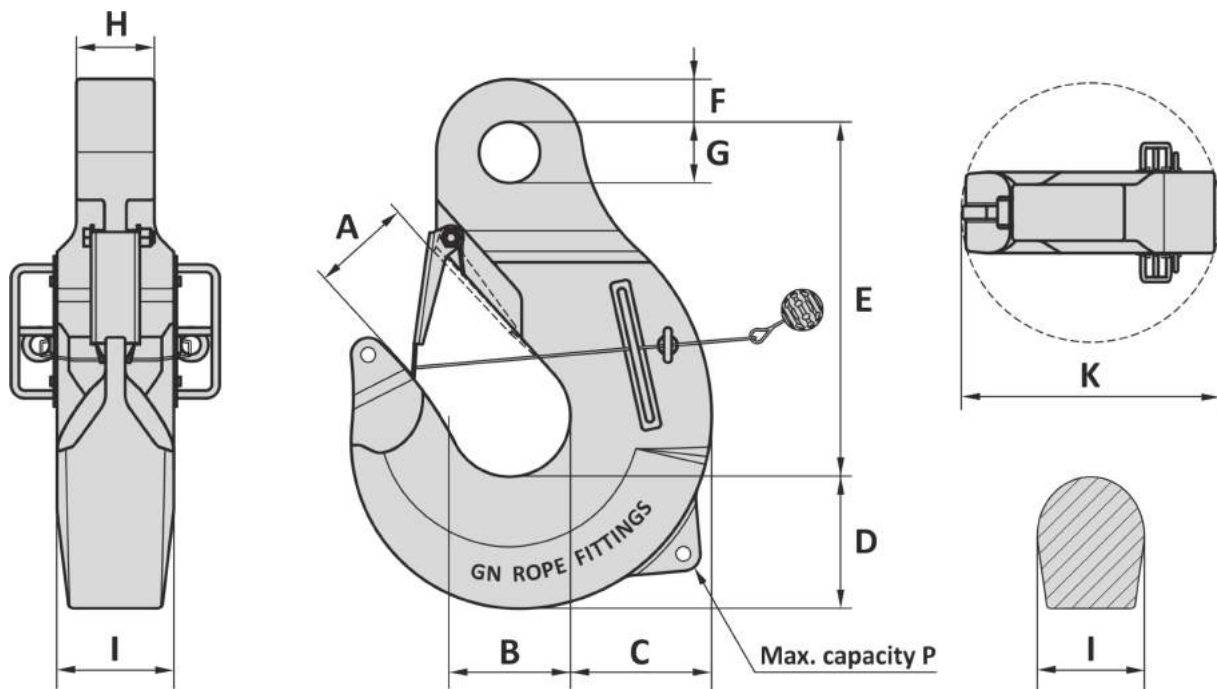

Art. No.	WLL ton	MBL ton	A mm	B mm	C mm	D mm	E mm	F mm	G mm	H mm	I mm	K mm	P ton	Weight kg
73000050	50	200	103	120	140	125	392	49	73	60	90	366	2	66
73000063	63	252	109	130	160	140	423	53	85	70	100	406	3.25	90
73000080	80	320	119	140	180	160	465	60	90	80	120	453	4.75	133
73000100	100	400	142	160	190	165	530	65	110	100	140	495	4.75	187
73000150	150	600	157	180	230	200	590	70	120	120	180	588	6.5	314
73000200	200	800	180	210	260	230	678	78	135	145	200	665	8.5	467
73000250	250	1000	218	250	290	260	750	90	150	170	230	743	9.5	656
73000300	300	1200	259	300	320	290	865	100	160	180	260	832	12	915
73000400	400	1600	280	320	350	320	910	105	180	200	300	909	17	1218
73000500	500	2000	294	340	390	340	985	110	190	220	320	982	17	1541
73000600	600	2400	304	350	420	370	1035	120	210	250	340	1037	25	1883
73000700	700	2800	317	360	450	390	1060	125	220	280	380	1097	25	2290
73000800	800	3200	327	380	500	440	1180	140	240	300	400	1213	25	2994
73000900	900	3600	338	400	520	460	1260	150	260	320	420	1282	35	3565
73001000	1000	4000	353	420	560	480	1340	160	280	340	440	1345	35	4250
73001250	1250	5000	371	450	600	530	1415	185	310	360	480	1452	42.5	5500
73001550	1550	6200	394	480	660	590	1505	205	330	360	540	1566	42.5	7000

Tolerance: Machined parts ± 1 mm

25-07-2018