



# SafeLifting

## Load shackle 1000T



### Technical Data

Load rating	1000T
Proof load	150% of rated load
Ultimate load	400% of rated load
Weight	1460Kg
Operating temperature range	-25° to +70°C
Power supply wireless output	1.5V AA Batteries

### Specifications

- IP 67
- Radio range up to 350M with no obstructions or interference.
- RF 2,4 Ghz, ISM

<b>A</b> mm	230
<b>B</b> mm	240
<b>C</b> mm	700
<b>D</b> mm	420
<b>E</b> mm	240
<b>F</b> mm	380
<b>G</b> mm	750
<b>H</b> mm	1290
<b>I</b> mm	420
<b>J</b> mm	1020
<b>M</b> mm	127

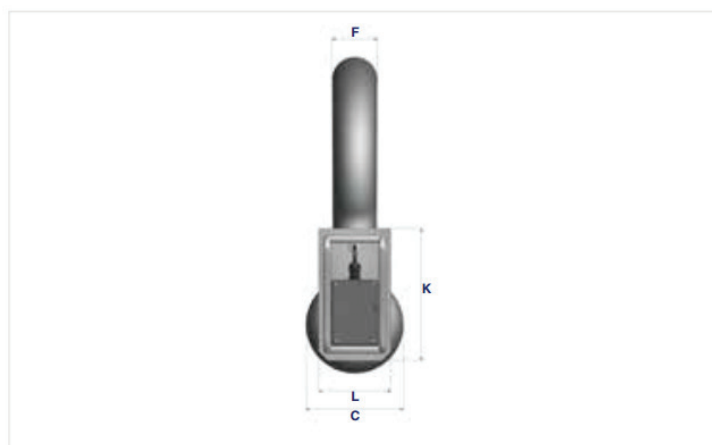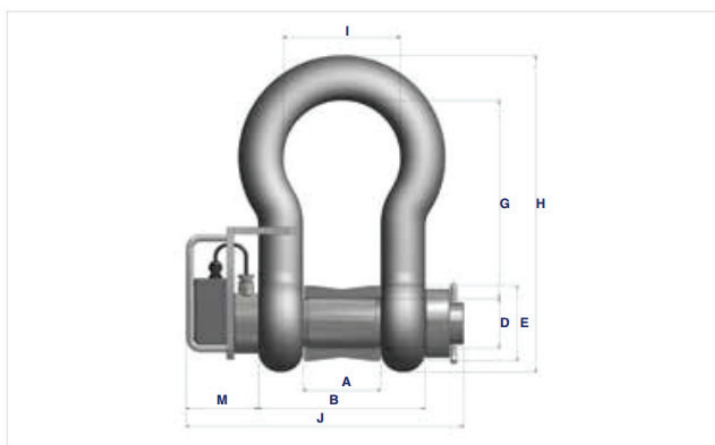

### Loadlink Configuration

This product can be used in combination with our custom made Link plate and a 1000T Wide Body Shackle.