



SafeLifting

Datasheet GN H14 300T

| | |
|------------------------|---|
| Material | : Alloy steel quenched and tempered |
| Safety factor | : ≤ 2000 ton 5 times $> 2000 \leq 3000$ ton 4,5 times > 3000 ton 4 times |
| Finish | : Painted |
| Temperature range | : ≤ 40 ton -20°C up to $+200^{\circ}\text{C}$ > 40 ton -40°C up to $+200^{\circ}\text{C}$; Polar Rated |
| Standard certification | : Certificate of Conformity 3.1 material certificate EN 10204 |


Sharp corners create stress points on slings

GN H14 shackle



Rounded wide body protects sling for damages

Non-standard sizes or custom products available on request

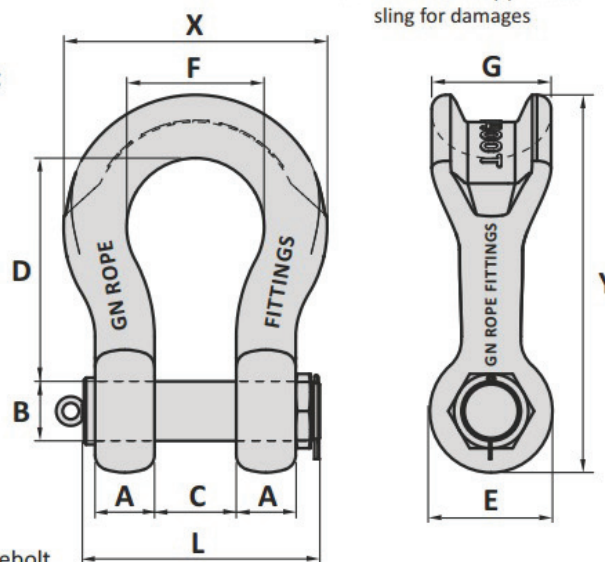

* Shackles from WLL 30 ton ≤ 125 ton are not supplied with an eyebolt

| Art. No. | WLL ton | A mm | B mm | C mm | D mm | E mm | F mm | G mm | L mm | R mm | X mm | Y mm | Weight kg |
|----------|---------|------|------|------|------|------|------|------|------|------|------|------|-----------|
| 36000300 | 300 | 140 | 134 | 195 | 600 | 280 | 350 | 265 | 580 | 140 | 628 | 947 | 368 |

Tolerance: Inside length $\pm 7.5\%$, all other forged parts $\pm 5\%$, machined parts ± 1 mm

| Art. No. | WLL ton | A inch | B inch | C inch | D inch | E inch | F inch | G inch | L inch | R inch | X inch | Y inch | Weight lbs |
|----------|---------|-----------------|------------------|-------------------|------------------|-------------------|--------------------|-------------------|--------------------|-----------------|--------------------|-------------------|------------|
| 36000300 | 300 | 5 $\frac{1}{2}$ | 5 $\frac{3}{32}$ | 7 $\frac{11}{16}$ | 23 $\frac{3}{8}$ | 11 $\frac{1}{32}$ | 13 $\frac{25}{32}$ | 10 $\frac{5}{16}$ | 22 $\frac{27}{32}$ | 5 $\frac{1}{2}$ | 24 $\frac{23}{32}$ | 37 $\frac{3}{32}$ | 811 |

Tolerance: Inside length $\pm 7.5\%$, all other forged parts $\pm 5\%$, machined parts $\pm \frac{1}{32}$ inch